

FPC-12706 - WIRELESS

HARDWARE FEATURES

Enclosures:

- IP44 weatherproof rating
- Powder coated mild steel
- Removable gland plate

Protection:

- Low voltage control and input circuitry

Control & interface:

- Process meter LED display
- Display be configured to read depth (m/mm), percentage full, or capacity (litres)

Inputs:


- Analogue 4-20mA input for hydrostatic transducer

Included with panel:

- Transmitter and receiver panels
- 2x 10 Amp 3 pin 1.5m power supply leads
- Stainless steel potable water hydrostatic pressure transducer (0-4m rating) with 24m cable

FUNCTION FEATURES

- Provides an extremely accurate and informative indication of water level within a tank
- 500m line of sight signal range between panels is ideal for situations where it is not possible or cost effective to run a cable

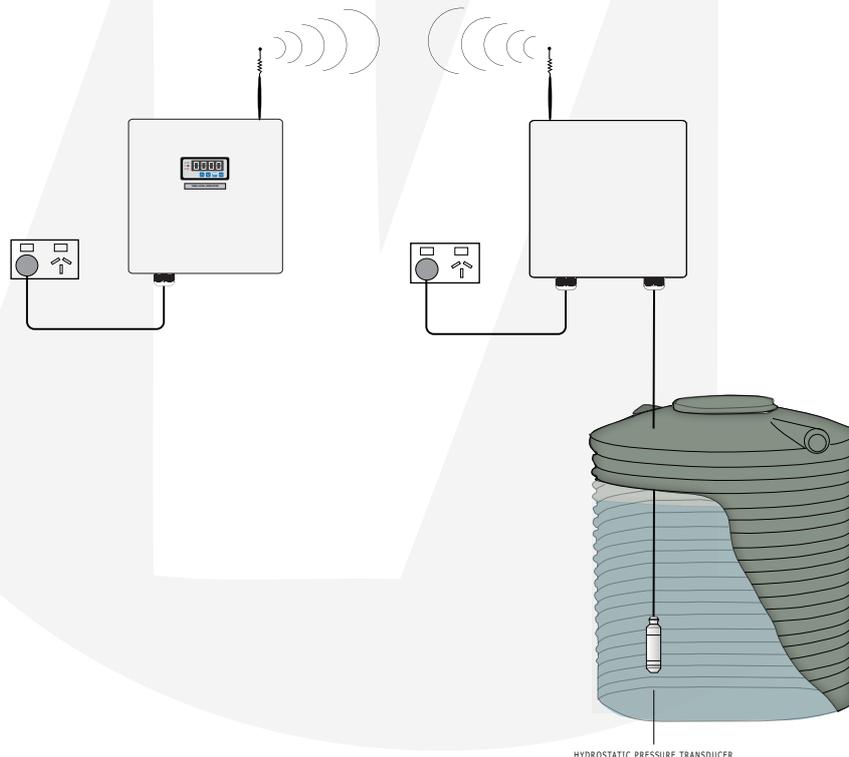

SINGLE PHASE (230VAC) - FPC-12706

Code	Description	Enclosure Size
FPC-12706	Tank Level Indicator - Wireless	300x300x150mm