

FPC-12707 - SOLAR WIRELESS

HARDWARE FEATURES

Enclosures:

- IP44 weatherproof rating
- Powder coated mild steel
- Removable gland plate

Protection:

- Low voltage control and input circuitry

Control & interface:

- Process meter LED display
- Display be configured to read depth (m/mm), percentage full, or capacity (litres)

Inputs:


- Analogue 4-20mA input for hydrostatic transducer

Included with panel:

- Transmitter and receiver panels
- 10 Amp 3 pin 1.5m power supply lead for 240Vac power supply to receiver panel
- Stainless steel potable water hydrostatic pressure transducer (0-4m rating) with 24m cable

FUNCTION FEATURES

- Provides an extremely accurate and informative indication of water level within a tank
- 500m line of sight signal range between panels is ideal for situations where it is not possible or cost effective to run a cable
- Solar powered transmitter panel allows tank level to be transmitted from a water storage where no mains power is available

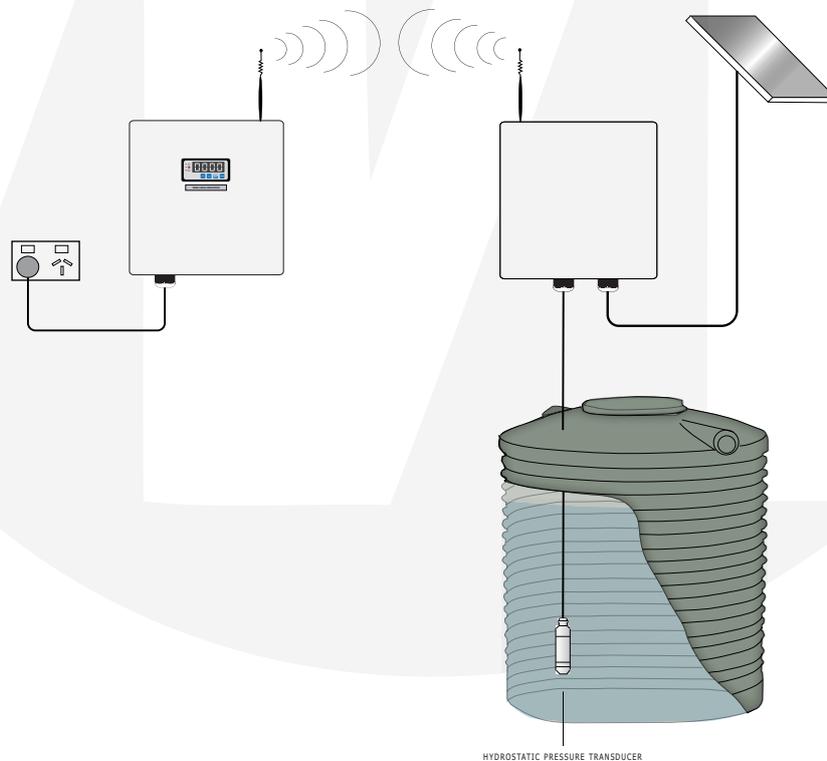

SINGLE PHASE (230VAC) - FPC-12707

Code	Description	Enclosure Size
FPC-12707	Tank Level Indicator - Solar Wireless	300x300x150mm