

## FPC-13097 - GSM/SMS

### HARDWARE FEATURES

Enclosures:

- IP55 weatherproof rating
- Powder coated mild steel
- Removable gland plate

Protection:

- Low voltage control and input circuitry

Inputs:

- Digital 24Vdc input for remote signal

Outputs:



- Relay switched output for connection to a remote signal

Included with panel:

- Transmitter and receiver panels with antennas
- 4G SMS modem for each panel (requires 2x standard 15x25mm SIM cards)
- Internal battery for battery backup on power failure
- 2x 10 Amp 3 pin 1.5m power supply leads

### FUNCTION FEATURES

- Enables remote switching of pump controllers where an interlink cable is too expensive and impractical, and radio communication is not an option
- Communicates transmitter-receiver via SMS on remote signal input
- In addition to remote switching, the 4G SMS dialler sends descriptive text message when an alarm condition is initiated or cleared, on power failure and when battery backup voltage drops too low
- Up to 5 phone numbers can receive messages

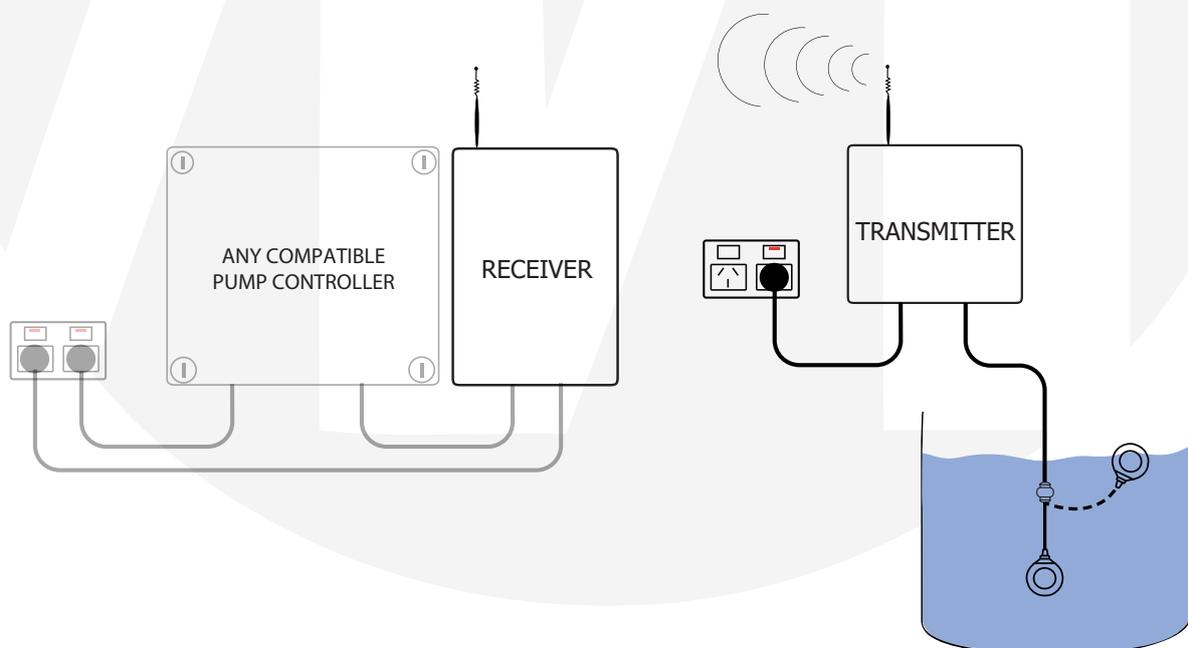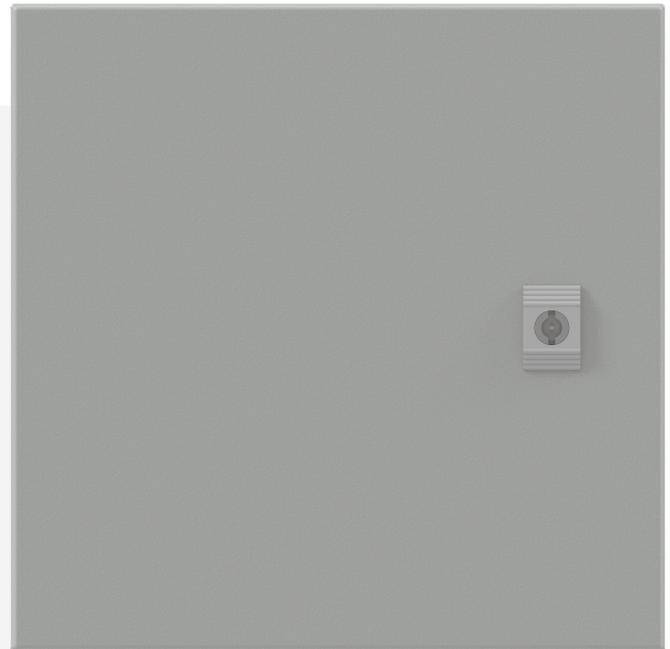

### SINGLE PHASE (230VAC) - FPC-13097

Code	Description	Enclosure Size
FPC-13097	Remote Signal Communicator - GSM/SMS	300x300x150mm