

FPC-12708-MP - DUAL MIMIC PANEL

HARDWARE FEATURES

2 X Enclosures:

- IP44 weatherproof rating
- Powder coated mild steel
- Removable gland plate

Protection:

- Low voltage control and input circuitry

Control & interface:

- 4x Process meter LED displays
- Each displays be configured to read depth (m/mm), percentage full, or capacity (litres)

Inputs:


- 2x analogue 4-20mA inputs for hydrostatic transducers

Included with panel:

- 10 Amp 3 pin 1.5m power supply lead
- 2x stainless steel potable water hydrostatic pressure transducers (0-4m rating) with 24m cable

FUNCTION FEATURES

- Provides an extremely accurate and informative indication of water level within two tanks
- Mimic Signal is used to display system parameters for Level/Pressure/Percentage across both display sets

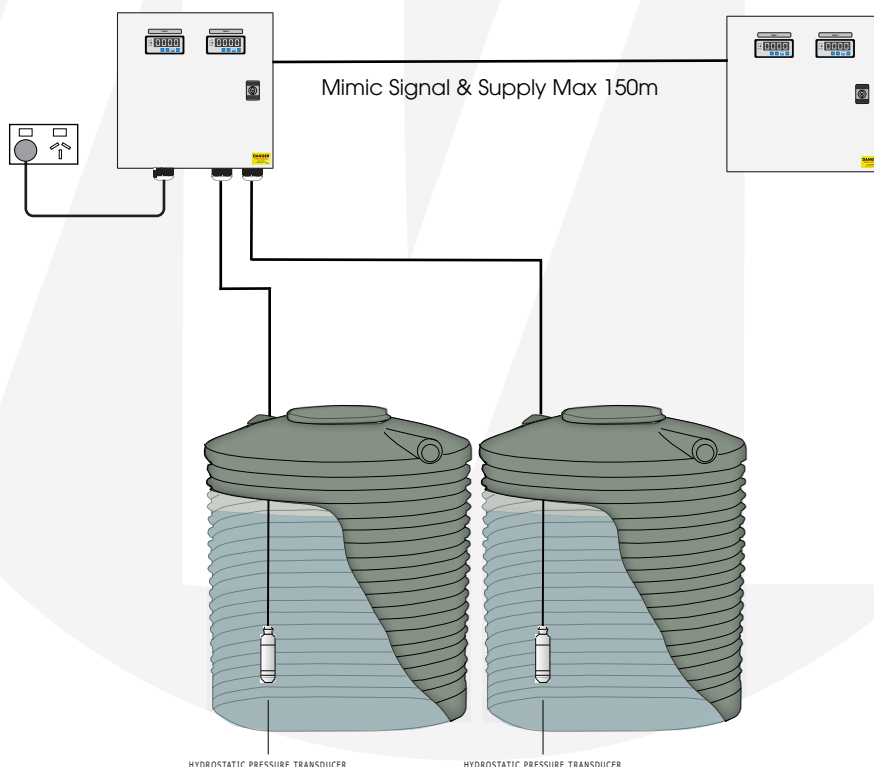

SINGLE PHASE (230VAC) - FPC-12708-MP

Code	Description	Enclosure Size
FPC-12708-MP	Tank Level Indicator - Dual Mimic	300x300x150mm (X2)