

# DAY/NIGHT SWITCH




## LR50 - RECESSED INTERNAL

### SPECIFICATIONS


<b>Weatherproof rating:</b>	IP54
<b>Switch rating:</b>	10 Amps
<b>Voltage rating:</b>	200 - 250V
<b>Frequency:</b>	50Hz
<b>Rated current:</b>	Resistive - 10 Amps Inductive - 4 Amps
<b>Switching cycles on resistive load:</b>	> 200 000
<b>Volt drop after 1000c at 1800VA load:</b>	< 100mV
<b>Light intensity for switch ON:</b>	60 Lux
<b>Light intensity for switch OFF:</b>	90 Lux
<b>Cut out hole:</b>	9.5mm

### FEATURES & BENEFITS

- Photoelectric-Cell technology
- Unique N/C 'fail on' circuitry
- Compact design - Ideal for tight applications
- Designed for recess mounting, eg - Inside light fittings
- 1 year warranty.

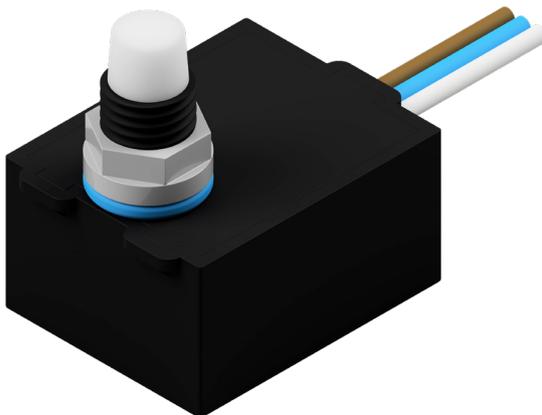


FSW-12207

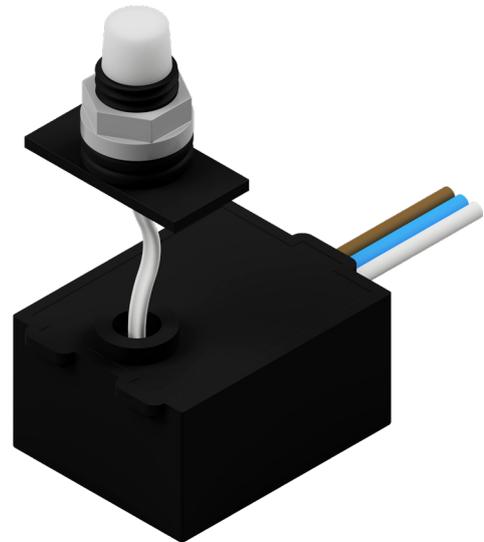

FSW-12207-L

### DIMENSIONS

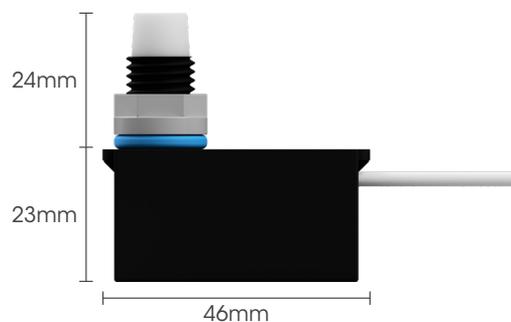

### DAY/NIGHT SWITCHES - LR50 RANGE

Code	Description	Packing	MOQ	Ctn
FSW-12207	Day/Night Switch - LR50 (10mm Male Entry)	1	1	10
FSW-12207-L	Day/Night Switch - LR50 with Sensor Extension	1	1	10