

UNDERSINK/SULLAGE CHAMBER ALARM

FPC-12659 - VALVE SHUT-OFF

HARDWARE FEATURES

Enclosure:

- IP54 weatherproof rating
- Polycarbonate
- Mounting brackets included

Protection:

- Low voltage control and input circuitry
- No hard wiring needed

Alarms:

- Audible (buzzer) alarm

Control & interface:

- Electronic Keypad
- Indicator lights for power on and level alarm
- Audible alarm mute/reset/test button

Inputs:

- Digital 12Vdc input for float switch

Outputs:


- 12Vdc output for solenoid valve
- BMS volt free output for common fault

Included with panel:

- 10 Amp 3 pin 1.5m power supply lead
- 20mm male/male 12Vdc pulse latching solenoid valve (pre-connected)
- Magnetic float switch with 10m cable (pre-connected)

FUNCTION FEATURES

- In the event of 'high level', the controller activates the alarm and pulse closes the valve, ensuring no further mains water enters the sink and chamber
- If power to the controller is switched off, the valve is immediately closed

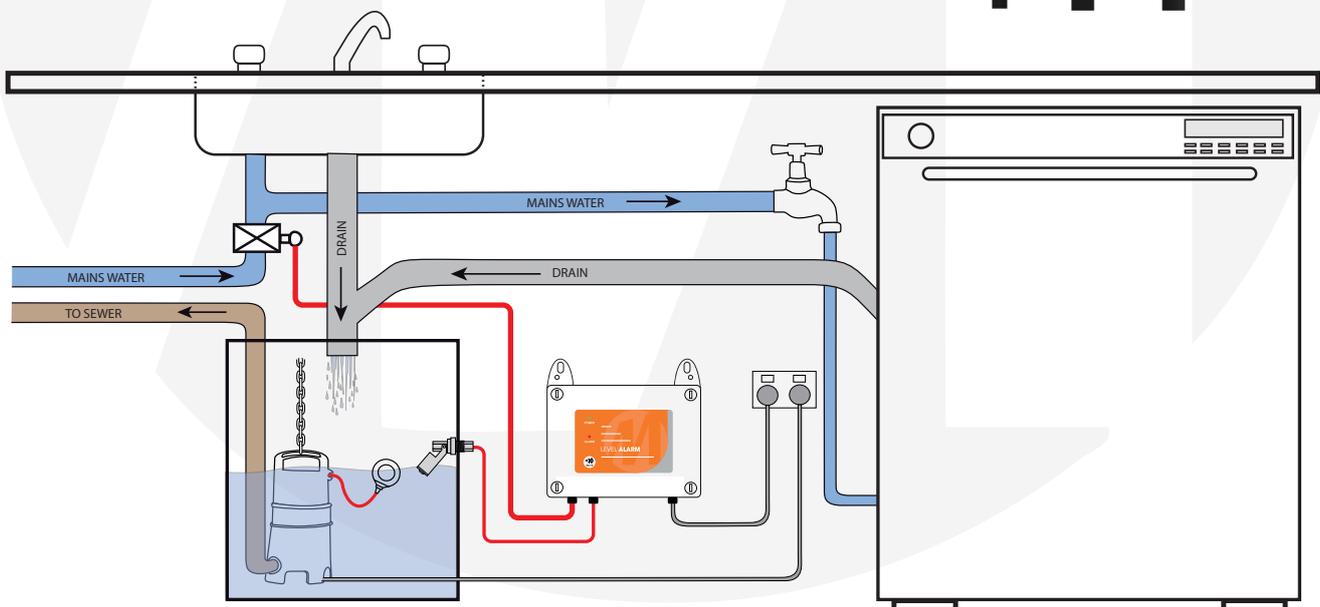

SINGLE PHASE (230VAC) - FPC-12659

Code	Description	Enclosure Size
FPC-12659	Undersink/Sullage Chamber Alarm - Valve Shut-Off	200x160x95mm