

FSW-12565

FEATURES


- High quality housing suitable for most liquids, such as oil and mild chemicals
- Fully immersible
- Ideal for water tank systems, such as rain or waste water management and activating boat bilge pumps
- Can be used to control pumps and electric valves when liquid level change
- Features a waterproof membrane which mounts on the inside of the tank

SPECIFICATIONS

- Switching current: 0.5A DC
- Contact rating: 1.5A @ 200VDC (max)
- Contact resistance: 100 m Ω
- Insulation resistance: 10¹² m Ω
- Magnetic sensitivity: 20 to 50 AT
- Operate time: 0.8ms
- Temperature rating: -30°C to 60°C
- Lead details: Length: 4m
Diameter: \varnothing 5.6mm
Material: Polyethylene



DIMENSIONS

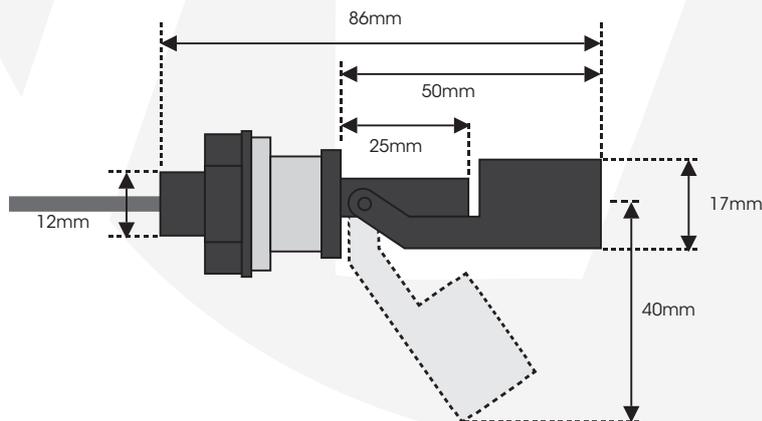

MAGNETIC HORIZONTAL FLOAT SWITCH

Code	Description	Cable length	Packing	MOQ	Ctn
FSW-12565	Magnetic Horizontal Float Switch	4m	1	1	20