

WALL BOX



FIRE RATED

FEATURES & BENEFITS

- Designed for mounting switches and outlets in walls that have a specified fire rating
- Fully compliant to Australian Standards AS1530.4-2015
- Warringtonfire Aust Pty Ltd certificates available on request - Certificate no. FAS220106
- Fire rating of FRL -/120/120 (2 hours fire resistance) for back to back, side to side and above & below configurations
- Acoustic Rated - Tested to AS 1191 and AS/NZS ISO 717-1. Test reports available on request
- Supplied complete with intumescent pads and acoustic seal
- Cable entry holes - 3 in top, 2 knockouts in back
- Complete with integral 'wall box earthing' and 'earth cabling termination' connector
- Must be used with an approved Fire Rated sealant.


SPECIFICATIONS

Fire rating:

- Fire Rating FRL -/120/120

Dimensions:

- 52mm (H) x 95mm (W) x 50mm (D)

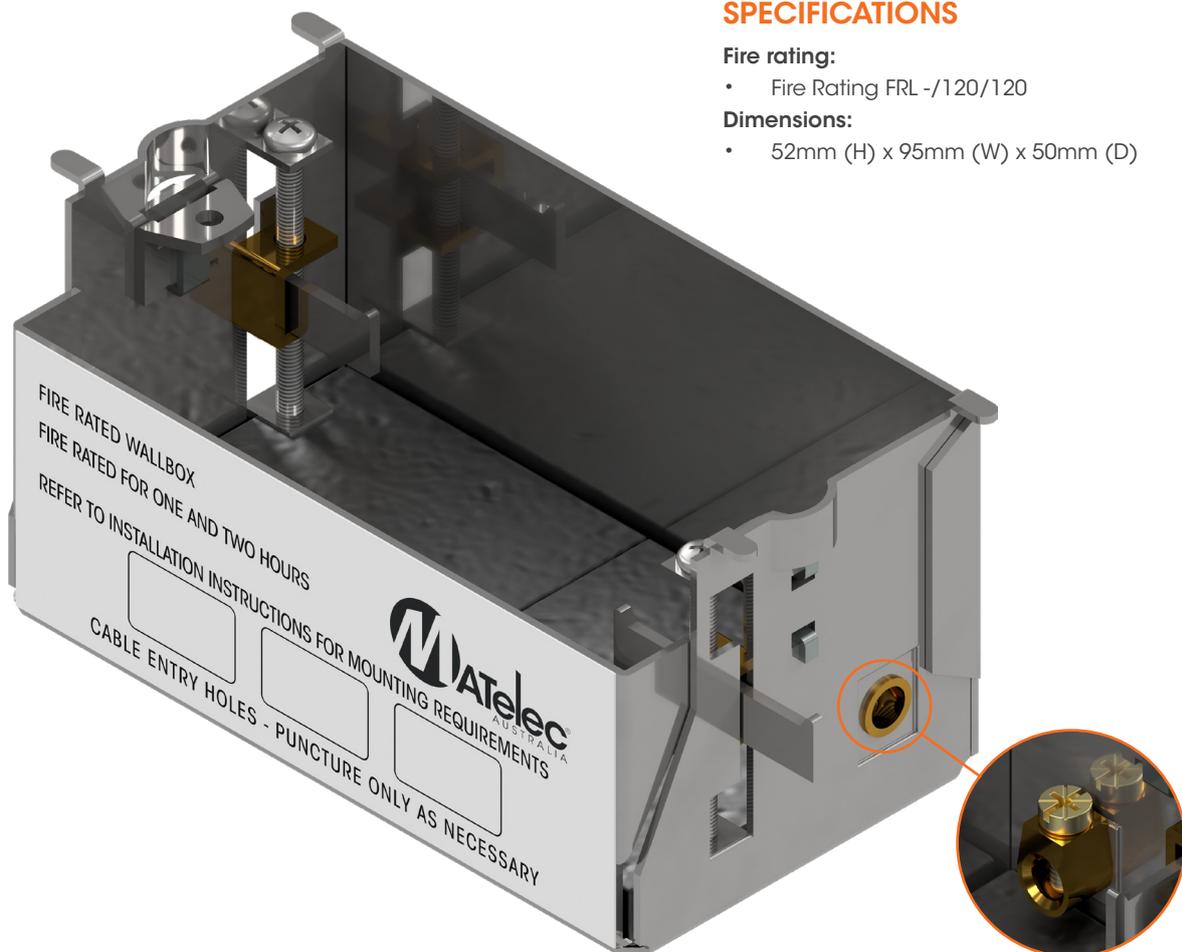

Brass earth connector

WALL BOX - FIRE RATED RANGE

Code	Description	Packing	MOQ	Ctn
FWB-90000	Wall Box - Fire Rated	10	10	100