

# TIME SWITCH & CONTACTOR BUNDLE



## HOT WATER INSTALLATIONS

### HWB-TIMER/CON-1



#### TIMER FEATURES & BENEFITS

- Simple programming functionality
- Quartz oscillator providing precise time control
- Compact slimline design
- Transparent display flap for added protection
- Manual override feature
- Lithium back-up battery
- 2 year warranty.



#### SPECIFICATIONS

**Mounting:**

- Din Rail

**Weatherproof rating:**

- IP20

**Supply voltage options:**

- 240Vac

**Operating frequency:**

- 50/60Hz

**Power consumption:**

- 1W

**Relay outputs:**

- N/O

**Operational current range:**

- Resistive 16A,  
inductive 2.5A

**Timing range:**


- 24 hours, 15 min  
segments

**Max cable capacity:**

- 1 Phase: 4mm<sup>2</sup>


**Working reserve time:**

- 100 hours

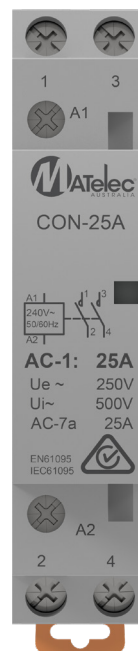

#### CONTACTOR FEATURES & BENEFITS

- Compact and modular
- Hum-Free operation Ideal for remote switching
- Comprehensive range
- 2 year warranty.

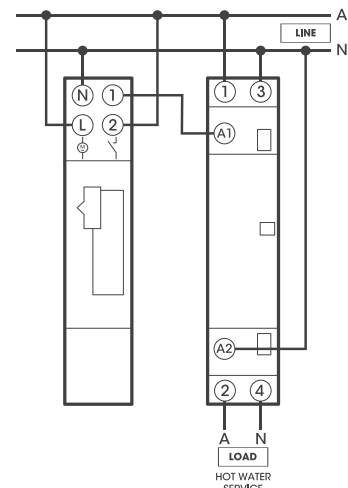

#### SPECIFICATIONS

**Control voltage:**

- 240Vac

**Operating frequency:**

- 50/60Hz

**Auxiliary contact****(breaking capacity):**

- AC12 5A 240Vac

**Operating****temperature:**

- -5°C to +50°C

**Storage temperature:**

- -40°C to +70°C

**Endurance (O/C)**

- 100,000 cycles

**Max no. of switching a day:**

- 100

**Insulation voltage (Ui)**

- 500 Vac

**Rated impulse withstand voltage**

- 2.5kV (4kV for  
12/24/48V AC)

**Weatherproof rating:**

- Device only: IP20  
(Requires enclosure)

Code	Description
TIMER-24H/A	Time Switch - Din Rail Mount - Analogue - 24 Hour - 240V

Code	Description
CON-25A/2NO	Modular Contactor 240Vac 25A 2NO