

LED WEATHERPROOF VANDAL RESISTANT FITTINGS




OXFORD IP66

FEATURES & BENEFITS

- Vandal resistant strength
- High quality industrial design
- Sleek slimline design
- Quick wiring access point
- OSRAM LED driver and high output LED chip
- SAA approved
- Ideal for high traffic areas and washdown bays
- All fixings and stainless steel brackets supplied
- Available as an emergency backup version, or with a sensor
- 10 year warranty (5 year for emergency & sensor versions).

SPECIFICATIONS

Materials:	Lens & base - UV stabilised polycarbonate Clips - 304 stainless steel (316 also available)	Emergency Version	
Fireproof rating:	PC 850°C VI	Battery charge time:	24 hours
Weatherproof rating:	IP66	Discharge time:	3 hours
Impact resistance:	IK08	Sensor Version	
LED Colour:	5700K daylight	Sensing range:	5m max
Operating temperature:	-35 °C to 60°C	Sensing range options:	100%, 75%, 30%, 25%
Lumen/watt:	130lm/W	Time delay:	5/30/90 sec, 3/20/30min
Power factor:	0.98	Daylight sensor:	Disable, 50/30/10/2 lux
Working life:	50,000 hours	Mounting height:	3 - 6m
		Inductive/lighting load:	200W max

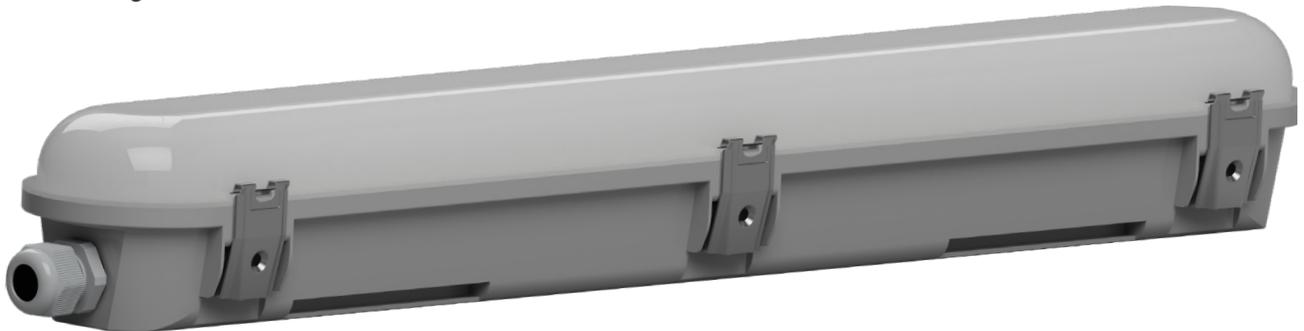

DIMENSIONS

Version	Length (mm)	Height (mm)	Width (mm)
20W	650	90	69
36W	1240	108	87



LED WEATHERPROOF FITTINGS - OXFORD IP66 RANGE

Code	Description	Lumens	Packing	MOQ	Ctn
FLU-06020	Oxford IP66 LED Fitting - 20W	2600	1	1	9
FLU-06020-S	Oxford IP66 LED Fitting - 20W - With Sensor	2600	1	1	9
FLU-12036	Oxford IP66 LED Fitting - 36W	4680	1	1	6
FLU-12036-EB	Oxford IP66 LED Fitting - 36W - Emergency Version	4680/450 on battery	1	1	6
FLU-12036-S	Oxford IP66 LED Fitting - 36W - With Sensor	4680	1	1	6
FLU-OXCLIP/36	Oxford 316 Grade Stainless Steel Clips		12/pack	1 pack	1 pack