

ROOF PENETRATION SEALS



FEATURES & BENEFITS

- UV resistant EDPM rubber
- Durable, lead free material
- Reinforced aluminium frame
- Designed to mould to multiple roof profiles
- 10 year warranty
- Twin side-ports for additional cabling requirements (not on SEAL-5/55B).

SPECIFICATIONS

Ozone resistance:

- ASTM D1149

Water resistance:


- ASTM D471

Tensile strength:

- 1598 psi

Tear strength:

- 205 ppi

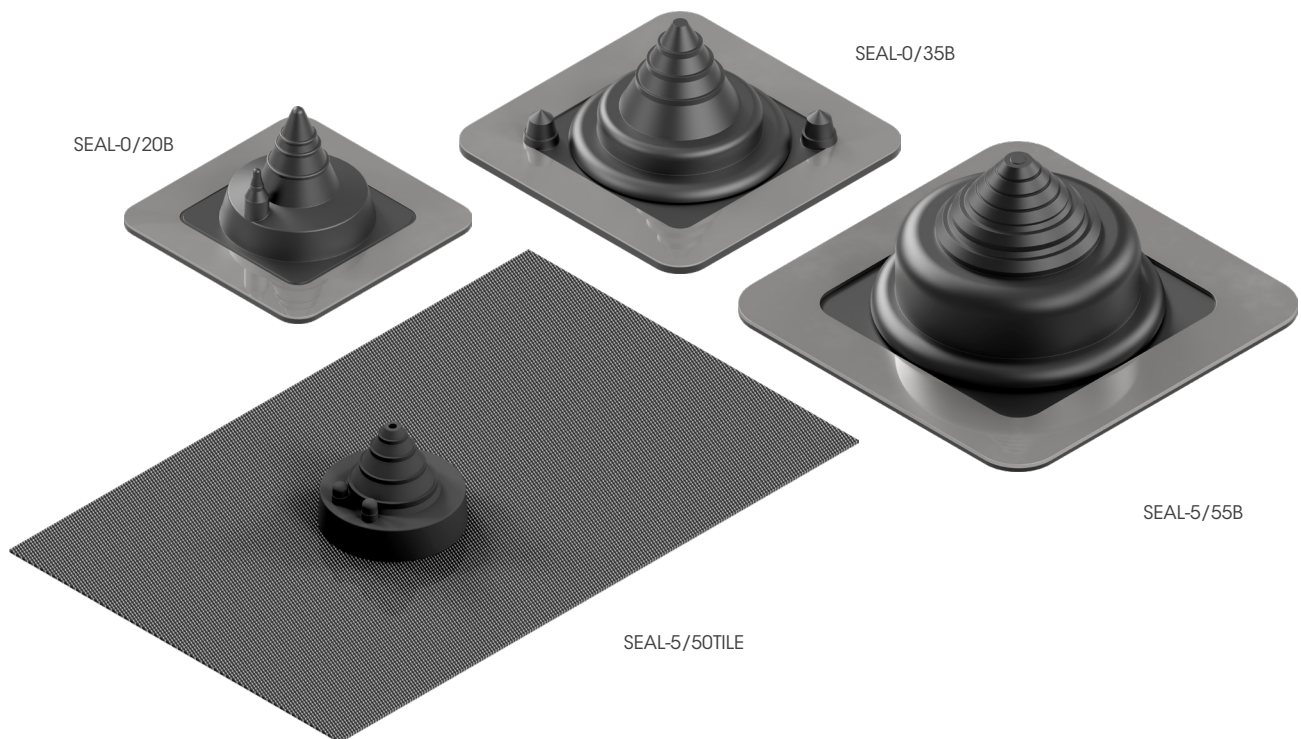

ROOF PENETRATION SEAL RANGE

| Code | Description | Penetration Size | Base Size | Packing | MOQ | Ctn |
|---------------|--------------------------------|------------------|-----------|---------|-----|-----|
| SEAL-0/20B | Roof Penetration Seal - Square | 0-20mm | 75x75mm | 25 | 25 | 500 |
| SEAL-0/35B | Roof Penetration Seal - Square | 0-35mm | 100x100mm | 20 | 20 | 200 |
| SEAL-5/55B | Roof Penetration Seal - Square | 5-55mm | 135x135mm | 20 | 20 | 100 |
| SEAL-5/50TILE | Roof Penetration Seal - Tile | 5-50mm | 280x450mm | 1 | 1 | 25 |